

PRODUCT DATASHEET

TRITEL – 3-dimensional Space Dosimetry Telescope

PROJECT TITLE	-
PROJECT REF.	PRO2020
PREPARED BY	REMRED Space Technologies Ltd.
SUPERVISOR	István Apáthy, istvan.apathy@remred.hu
ISSUE	1.0
DATE OF ISSUE	01/04/2020
STATUS	Issued
TYPE	Product Datasheet, Non-Confidential
REFERENCE	PRO2020-RR-PQA-DS-002_i1.0
CUSTOMER(S)	-
CONTRACT REF.	-
CUSTOMER ID.	-

Template file ref.: QUA2020-RR-PQA-DS-001_i01

APPROVAL

Issue	Date	Signatures		
		Author(s)	Reviewed by	Approved by

1.0	01/04/2020	Andras Gerecs	Anna Baranyai	Istvan Apathy
-----	------------	---------------	---------------	---------------

DISTRIBUTION LIST

Company	Name	No. of copies
N/A	N/A	N/A
REMRED archives		1

CHANGE LOG

Reference	Date	Issue	Revision
PRO2020-RR-PQA-DS-002_i1.0	01/04/2020	1.0	1

CHANGE RECORD

Issue: 1.0	Revision: 1		
Reason for change	Date	Page	Paragraph(s)
N/A (initial release).			

TABLE OF CONTENTS

1. Purpose and Scope.....	4
2. Application and Key Features	5
2.1. Application	5
2.2. Key features.....	5
3. Specification.....	6
3.1. General specification.....	6
3.2. Environmental specification	6
3.3. Interfaces.....	7
3.4. Measurement capabilities.....	7
4. Flight Heritage	8
5. List of Abbreviations.....	9
6. List of Figures.....	10
7. List of Tables.....	11
8. References	12
8.1. Applicable and Normative Documents.....	12
8.2. Reference Documents	12



1 Purpose and Scope

The present document provides detailed technical information about the TRITEL 3-dimensional Space Dosimetry Telescope.

The definitions and glossary of terms from ECSS-S-ST-00-01C [AD 1] apply to this document

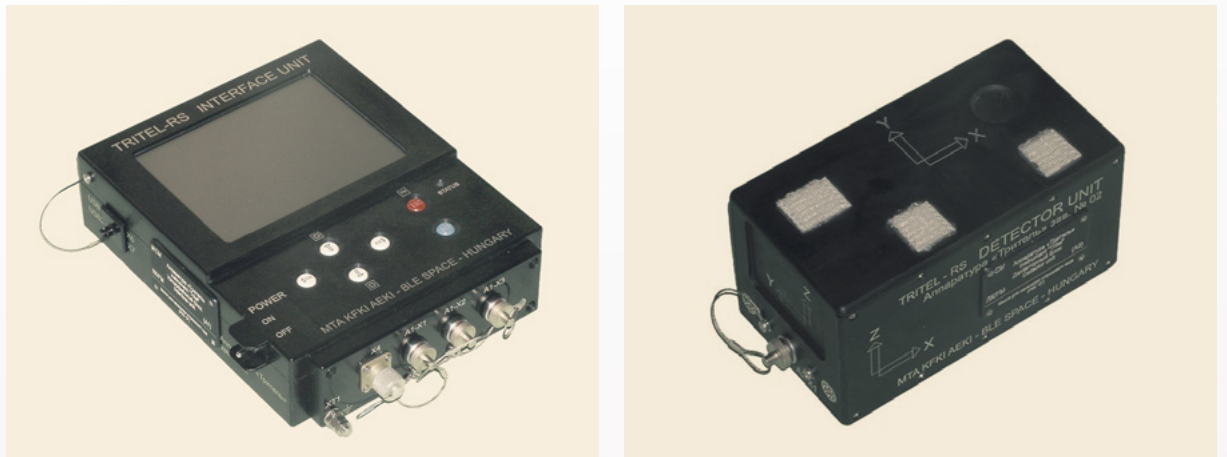


Figure 1 – TRITEL System (left: Central Handling Unit, right: Detector Unit)

2 Application and Key Features

2.1 APPLICATION

- ✓ **Space Dosimetry Monitoring for Manned Missions**
 - Proven space dosimetry instrument for manned space missions
 - To determine the absorbed dose and dose equivalent of in real time
 - To study shielding effects of the surrounding environment
 - Operated several times on-board the International Space Station
- ✓ **Space Radiation Research**
 - To determine the LET-spectrum of the incoming space radiation
 - To determine the average quality factor of the space radiation
 - To measure long-term radiation flux profiles
 - To obtain space weather related real-time data set
 - Operated on-board the ESEO SmallSat

2.2 KEY FEATURES

- ✓ **Space dosimetry instrument for manned space missions to determine the absorbed dose, dose equivalent, LET-spectrum and quality factor in space**
- ✓ **Detector unit can be used standalone in satellite missions**
- ✓ **3-dimensional silicon detector telescope system**
- ✓ **Central Handling Unit for astronauts**
- ✓ **Central Handling Unit provides**
 - Graphical user interface for astronauts (via touchscreen)
 - Visual real-time measurement information for astronauts
- ✓ **Configurable system**
 - External Detector Units
 - Central Handling Unit
 - Up to a maximum number of 3 Detector Units
- ✓ **Fully autonomous operation**
- ✓ **Controlled via graphical user interface or TM/TC**
- ✓ **Available detector interfaces: CAN, RS-485, RS-232**

3 Specification

3.1 GENERAL SPECIFICATION

Table 1 – General specification

	Detector Unit	Central Handling Unit
Power	2.6 W	2.0 W
Mass	~ 0.9 kg	~ 1.3 kg
Dimensions (H, W, L)	83 mm, 107 mm, 155 mm	215 mm, 160 mm, 52 mm
Operational temperature range	-40°C...+40°C	-40°C...+70°C
Non-operational temperature range	-40°C...+85°C	-40°C...+85°C
Operational pressure range	10 ⁵ Pa...10 ⁻⁴ Pa	10 ⁵ Pa...10 ⁻⁴ Pa
Outgassing rate	<1% TML <0.1% CVCM	<1% TML <0.1% CVCM
Data rate	0.33 MB/day	N/A
Handling environment humidity	20...65% relH	20...65% relH

3.2 ENVIRONMENTAL SPECIFICATION

Table 2 – Environmental specification

Parameters	Values	
Thermal-vacuum	Temperature environment	-40°C...+85°C
	Vacuum environment	<10 ⁻³ Pa
	Max. depressurisation rate	5.0 kPa/s
Vibration	Sine vibration environment for 3-axis	20...100 Hz, 16.0 g
	Random vibration environment for 3-axis	5...2000 Hz, 17.0 g ^{RMS}
	Shock pulse for 3-axis	100 g, 0.25 ms
EMC	EMC environment	Tailored ECSS-E-ST-20-07C Rev.1 [AD 2]
Radiation	Used components	COTS
	Proven lifetime	>3 years proven lifetime in LEO

3.3 INTERFACES

Table 3 – Interfaces

Parameters	Values
Input power bus*	17.0 V...34 V (non-redundant or redundant)
TM/TC interface*	CAN Bus / RS-232 / RS-485 (non-redundant or redundant)

* For Detector Unit and Central Handling Unit as well.

3.4 MEASUREMENT CAPABILITIES

Table 4 – Measurement capabilities

Parameters	Values
Particle types	electrons, protons, heavy ions
Flux range (isotropic)	$1.5 \cdot 10^{-1} - 4.5 \cdot 10^4 \text{ cm}^{-2}\text{s}^{-1}$
Count rate range (<10% dead time)	0-50,000 cps
LET in water range	0.2 – 120 keV/ μm
Deposited energy range	50 keV – 70 MeV
Minimum absorbed dose rate in water (for relativistic protons with energy deposit of $\approx 100 \text{ keV}$ in Si)	50 nGy/h 10 mGy/h
Maximum absorbed dose rate in water (for relativistic protons with energy deposit of $\approx 100 \text{ keV}$ in Si)	0.5 Gy/h 7 Gy/h

Table 5 – 3-dimensional Telescope System specification

Parameters	Values
Radius of the detectors	8.4 mm
Effective surface of the detectors	222 mm ²
Geometric factor G (for one telescope axis in 4π)	5.1 cm ² sr
Maximum angle of incidence (for one detector pair)	62.1°
Average path length in the detector (assuming an isotropic field)	361 μm
Ratio of the maximum and minimum path lengths	2.14

4 Flight Heritage

Table 6 – Flight heritage

Mission name	Hosting platform	Orbit details	Duration	Remarks
TRITEL-SURE	ISS Columbus module	LEO 300-400 km	6 months	One detector unit and one central handling unit
TRITEL-RS	ISS Zvezda module	LEO 300-400 km	>6 months	One detector unit and one central handling unit
ESEO-TRITEL	ESEO SmallSat	LEO 500-600 km	>6 months	One detector unit

5 List of Abbreviations

AD	Applicable Documents
COTS	Commercial Off-The-Shelf
CVCM	Collected Volatile Condensed Material
ECSS	European Cooperation for Space Standardization
ESEO	European Student Earth Orbiter
ISS	International Space Station
LEO	Low Earth Orbit
LET	Linear Energy Transfer
RD	Reference Documents
TC	Telecommand
TM	Telemetry
TML	Total Material Loss

6 List of Figures

Figure 1 – TRITEL System (left: Central Handling Unit, right: Detector Unit)..... 4



7 List of Tables

Table 1 – General specification	6
Table 2 – Environmental specification.....	6
Table 3 – Interfaces	7
Table 4 – Measurement capabilities	7
Table 5 – 3-dimensional Telescope System specification.....	7
Table 6 – Flight heritage.....	8
Table 7 – Applicable and Normative Documents	12
Table 8 – Reference Documents	12



8 References

8.1 APPLICABLE AND NORMATIVE DOCUMENTS

Table 7 – Applicable and Normative Documents

AD	Title	Reference	Version
[AD 1]	ECSS system - Glossary of terms	ECSS-S-ST-00-01C	1 Oct 2012
[AD 2]	Space engineering - Electromagnetic compatibility	ECSS-E-ST-20-07C Rev.1	7 Feb 2012

8.2 REFERENCE DOCUMENTS

Table 8 – Reference Documents

RD	Title	Reference	Version
[RD 1]	-	-	-